

# Product datasheet

## SlimFix®-TR

**Continal**  
UNDERFLOOR HEATING

SlimFix®-TR is a low cost, thin (25mm), composite underfloor heating panel designed to make fitting underfloor heating easier and faster on solid, joisted and floating floor constructions.






### Features:

- Can be used as floating floor with or without battens
- 25mm thin composite panel
- Ideal for maximising heat outputs
- One universal panel, no need for end return panels
- Low cost

### System options:

- SlimFix®-TR-150 has 150mm centres for low temp applications
- SlimFix®-TR-200 has 200mm centres for high temp applications
- AluPlas®-16 or SUPERflex™-16 pipe

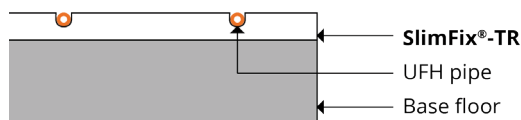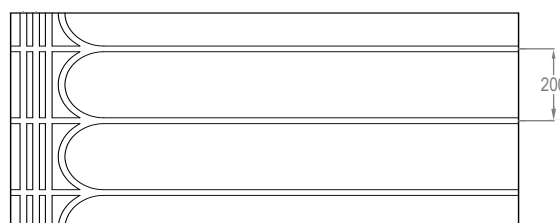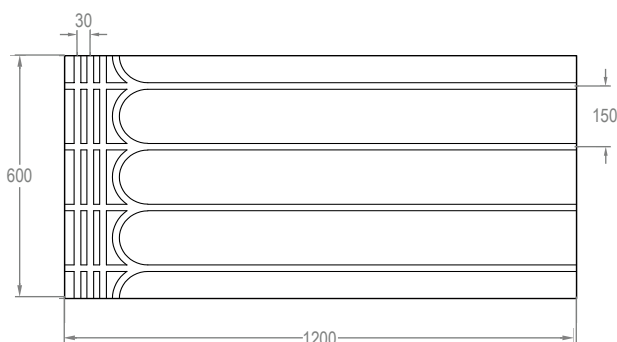

### Technical:

- Material: EPS-100
- Dimensions: 1200mm x 600mm x 25mm
- Pipe centres: 150mm or 200mm
- Pipe channels: 16mm
- Compressive strength: 100kPa
- Panel weight: 0.7kg
- Edge profile: square edge
- Foil diffuser: 45µm
- Minimum 18mm board to finish
- Continuous service temperature limit: 80°C
- Thermal conductivity: 0.036W/mK

### Other properties:

- Fire protection class: E
- 100% recyclable
- Non-toxic and non-biodegradable

## About us

No ifs, no buts. The award-winning Continal® service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.

