

# Product datasheet

## AluPlate™ fit-from-below

**Continal**  
UNDERFLOOR HEATING

A specialist solution to fit underfloor heating from below a floor.

The AluPlate™ fit-from-below system provides clipping, support and heat diffusion for underfloor heating installed below existing floor decks.

Particularly suited to timber frame constructions, with no increase in floor height.





The robust aluminium plate is engineered to grip the pipe, maximising heat transfer and diffusion. It securely clips the pipes in place at the designed pipe centres.

### Features:

- Used where the flooring deck already exists, and there is no option to increase the floor height
- A single plate to allow for flexibility of install
- Diffuses heat evenly across the finished floor
- Easy to install
- Suitable for most applications where the heat loss does not exceed 75W/m<sup>2</sup>

### Technical:

- Dimensions: 163mm x 1000mm x 0.7mm
- Pipe centres: single
- Pipe channels: 16mm
- Weight: 0.3kg

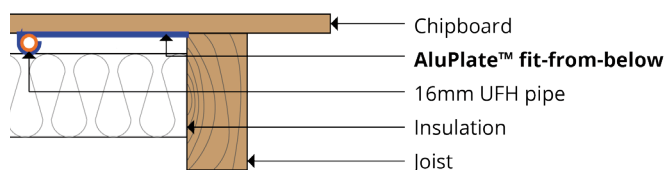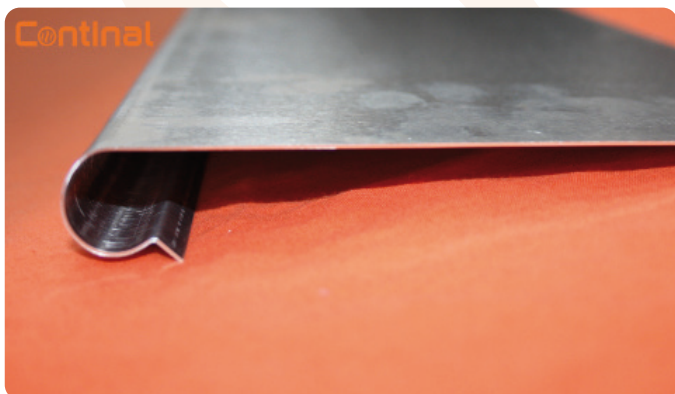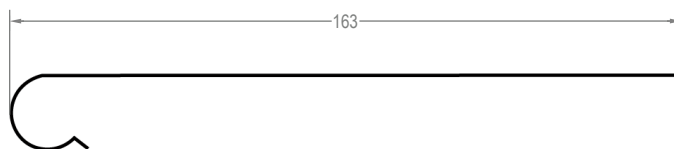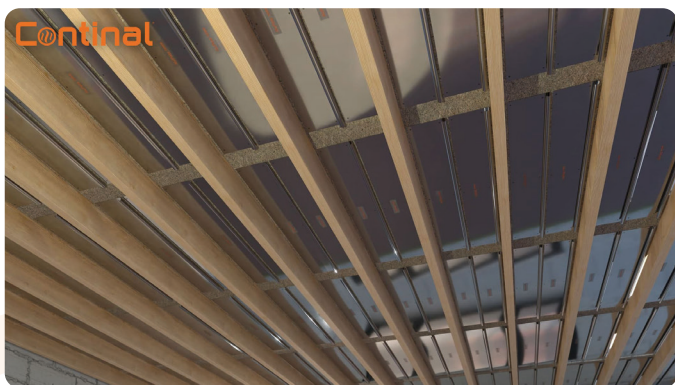

## About us

No ifs, no buts. The award-winning Continal® service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.

