

Simple to use, the Quantum wiring centre-RF enables easy pairing of RF thermostats. It provides easy push-fit wired connection for actuators, the pump heat source and our Quantum hub. Built-in overload protection and clear LED status indication ensure safe and reliable operation.



**Technical:**

- Dimensions: 356mm x 85mm x 67mm
- Weight: 900g
- IP rating: IP30
- Actuator contact: triac
- Maximum actuators per zone 15w: 4
- Maximum actuators between all wiring centres: 32
- Operating temperature: 0°C to 50°C
- Radio frequency: ZigBee 2.4 Ghz

**Electrical data:**


- Power supply: 230VAC 50/60Hz
- Fuse: 5A internal
- Pump contact: relay max 8A
- Volt free contact: relay max 16A

**Accreditations:**

- ETSI EN 300 328 V2.1.1 (2016-11)
- E62479:2010
- ETSI EN301 489-1 V2.2.0 (2017-03)
- ETSI EN301 489-17 V3.2.0 (2017-03)
- EN 60730-2-9:2010
- EN 60730-1:2016

**Features:**

- Easy to install
- 8 zones with 4 actuators per zone
- Push-in cable connections
- Volt free pump and boiler switching
- LED status indication
- Connectors to pump and boiler logic
- 5-year warranty

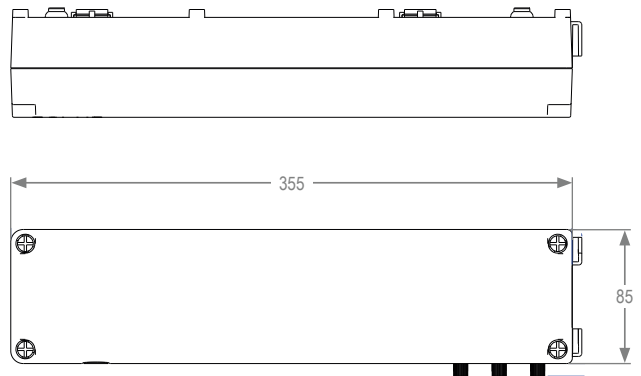

**About us**

No ifs, no buts. The award-winning Continal® service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.