


Product datasheet

DriDEK™-20

Continal
UNDERFLOOR HEATING

DriDEK™-20 is a dry screed panel, ideal to overlay on SlimFix®-18, SlimFix®-25, SlimFix®-TR, UltraSlim™-15, and OneBoard®.

DriDEK™-20 has extremely low thermal resistance when compared to the most common floor finishes (chipboard and wet screed), which maximises the performance of any low-profile system.

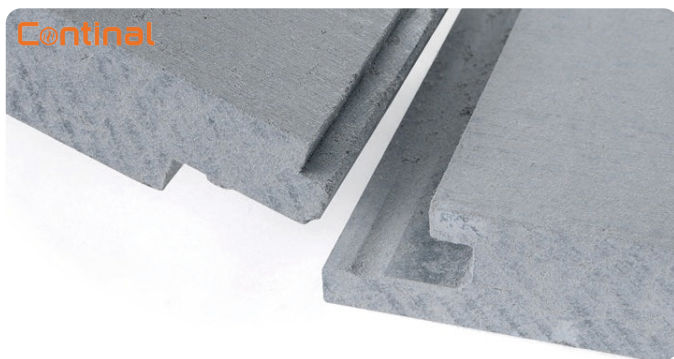

The 20mm thick dry panel also enhances the acoustic and fire resistance, and provides an easily installed dry flooring solution.

The interlocking edges are glued using the DriDEK™ adhesive to provide a perfect surface for all floor coverings.

DriDEK-20™ panels accept ceramic tiles, feature easy to install interlocking edges, and don't contract or expand when exposed to water.

Technical:



- Material: high density gypsum
- Dimensions: 1200mm x 600mm x 20mm
- Panel weight: 18kg
- Edge profile: tongue and groove
- Thermal resistance: 0.05m²/kW

Other properties:

- Global warming potential: <5
- Ozone depletion potential: 0
- Fire protection class: A1

Features:

- 20mm thin dry screed board
- High thermal performance: 400% vs chipboard
- Easy to cut and install
- Tongue and groove for easy flat installation
- Interlocking edges, no need for screws
- Ideal for bathrooms and kitchens: tile directly
- Compatible with laminate, ceramic tile and carpet
- High acoustic performance: robust detail E-FT-5 and E-FT-6

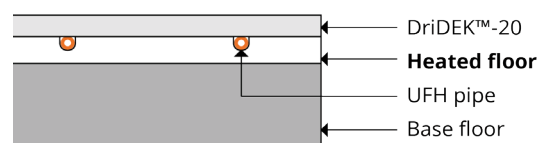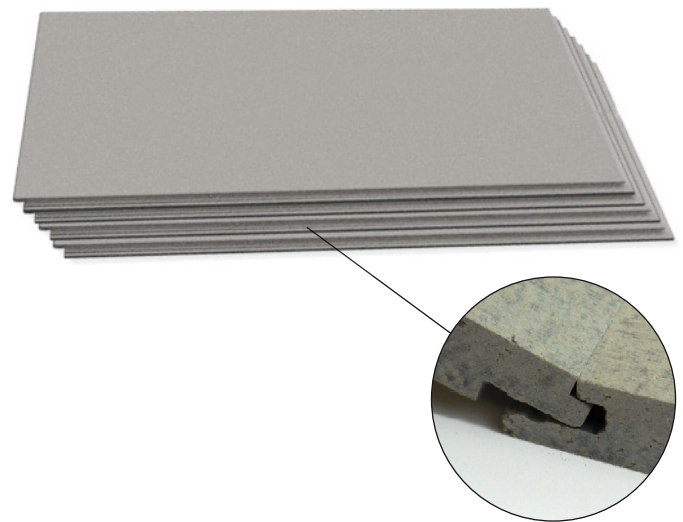

About us

No ifs, no buts. The award-winning Continal® service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.

