

## Solid floor / screed system

The Continal® screed system - Quick and easy, familiar to the installer and cost-effective.

The most common method of fitting underfloor heating, suitable for new builds and renovations where a new screed floor is being laid. Using our trusted SUPERflex™-16 or AluPlas®-16 UFH pipe and our Continal® fitting systems.

Whether you use Continal® staples, SpeedTrak® or pipe ties, you can be safe in the knowledge that this screed system will get the job done, be fast to install, and give the outputs the customer wants.

### Key system characteristics:



- Easy to install
- Most cost-effective solution
- Variety of screed depths
- Familiar to the builder
- No specialist equipment required

### System options:

- SUPERflex™-16 or AluPlas®-16 pipe
- Continal® staples
- Continal® pipe ties
- Continal® SpeedTrak®

## Key components:

- SUPERflex™-16 or AluPlas®-16 pipe
- Continal® edge insulation
- Pipe fixing method of your choice
- Manifold and water controls
- Thermostats and wiring centres

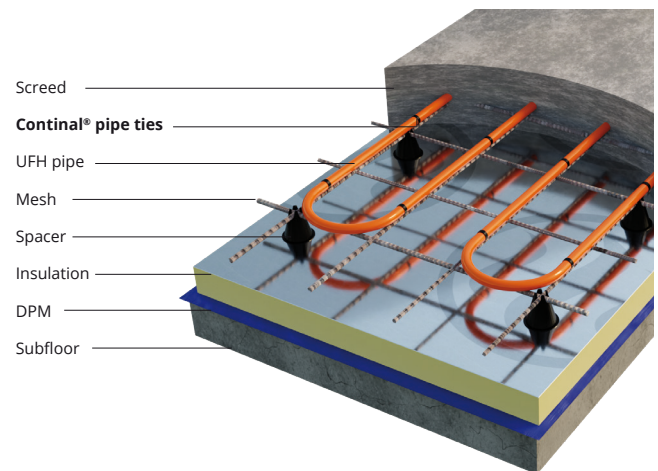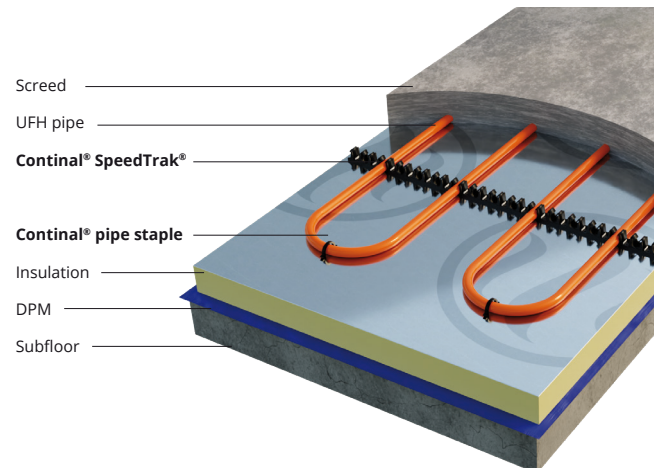

Heat output	
150mm pipe centres	92W/m <sup>2</sup> to 105W/m <sup>2</sup>
200mm pipe centres	85W/m <sup>2</sup> to 94W/m <sup>2</sup>
250mm pipe centres	78W/m <sup>2</sup> to 87W/m <sup>2</sup>

\* Achieving a 20°C room temperature with an external temperature of -3°C, these heat outputs are approximate based on a flow temperature of 40°C - 45°C with a 1 tog final floor covering. To be confirmed against heat loss calculations.

## About us

No ifs, no buts. The award-winning Continal® service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.