

TileFix[®]-18 / TileFix[®]-25 system

TileFix[®] – The only system you can tile directly onto, with a lowprofile from just 18mm.

TileFix[®] fast-response, high compressive strength system, is ideal for renovation, new build, whole house and single room projects. Designed to accept direct tiling with a flexible tile adhesive and is typically installed over existing solid or timber deck floors.

The system is designed to accept ceramic, porcelain, marble and stone tiles, using a suitable tile adhesive. The universal TileFix[®] panels provide pipe routing for return loops and distribution, ensuring simple installation.

Key system characteristics:

- Overfloor system suitable for any floor construction
- Ultra-high compressive strength panel
- Insulative composite panel for direct tiling
- Low-profile system
- Quick response
- High-performance system
- Universal panel for simple installation
- 18mm and 25mm variants

System options:

The TileFix[®] system is available in 2 thicknesses


- TileFix®-18: For 12mm pipes at either 100mm or 150mm
 (Typically used in smaller areas or where minimal floor height build is required)
- TileFix[®]-25: For 16mm pipes at 150mm
 (Typically used for larger and whole-house areas)

For:

- Ultra-low profile build up
- Tiling direct using suitable flexible adhesive
- Renovation or new build
- 100mm or 150mm pipe centres

Key components:

- TileFix[®]-18 or TileFix[®]-25 composite panels
- TileFix[®] adhesive
- SUPERflex[™]-12 pipe (18mm panels)
- SUPERflex[™]-16 / AluPlas[®]-16 pipe (25mm panels)
- Manifold and water controls
- Thermostats and wiring centres



Heat output range TileFix®-18

100mm pipe centres	70W/m ² to $85W/m^2$
150mm pipe centres	$60W/m^2$ to $75W/m^2$

Heat output range TileFix®-25


150mm pipe centres

About us

60W/m² to 75W/m²

25mm

*Outputs shown are approximate, depending on room temperature and floor covering. This range typically delivers the flow temperature with a tile floor covering. Based on a flow temperature of 45°C to 50°C.

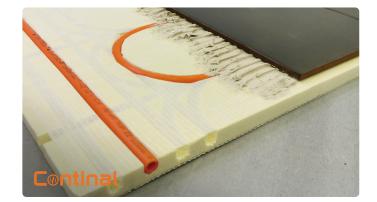

No ifs, no buts. The award-winning Continal[®] service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.

Rev:10/22 © 2022 Continal Group Ltd. All rights reserved. E & Ol

info@continal.ch 0

022 508 38 82

www.continal.ch