



SlimFix®-TR system

SlimFix®-TR is a composite system panel with built-in returns which is ideal for larger, whole-house projects as its quick and easy to install.

Suitable for both renovation and new build projects, and can be installed over existing solid or timber deck floors, or as part of a floating floor construction.

The system can be the base for a wood floor of minimum 18mm thickness, or installed with a suitable coverboard such as 18mm chipboard or DriDEK™-20 board (the SlimFix®-TR solution has excellent acoustic characteristics).

The universal SlimFix®-TR panels provide pipe routing for return loops and distribution, resulting in a simple installation.

Key system characteristics:

- Suitable for retrofit and new build projects
- Lightweight dry system
- Insulative and emissive composite panel for maximum performance
- Universal panel for simple installation
- 25mm thick
- Cost-effective

For:

- Low profile build up
- Renovation or new build
- 150mm or 200mm pipe centres


Key components:

- SlimFix®-TR universal panels
- SlimFix® double sided tape
- SUPERflex™-16 or AluPlas® pipe
- Manifold and water controls
- Thermostats and wiring centres
- Optional: DriDEK™-20 screedboard

System options:

The SlimFix®-TR system is available in pipe centre variants

- SlimFix®-TR-150: routed for pipes at 150mm centres
- SlimFix®-TR-200: routed for pipes at 200mm centres

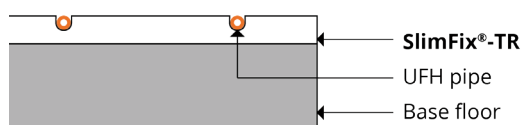

Heat output range

150mm pipe centres	55W/m ² to 65W/m ²
200mm pipe centres	45W/m ² to 55W/m ²

*Outputs shown are approximate, depending on room temperature and floor covering. This range typically delivers the flow temperature with a screedboard coverboard and 1 tog floor covering. Based on a flow temperature of 45°C to 50°C.



About us

No ifs, no buts. The award-winning Continal® service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.