# OneBoard® Plus structural system











OneBoard® Plus is a structural system that can be laid directly on joists. Saving you time and money on site.

The system is ideal for both new build and retrofit installations. For 400mm & 600mm joists.

The composite chipboard panel with heat dissipation foil offers excellent output and response, and is suitable for all heat sources.

The clever design, incorporating pipe returns and distribution, ensures a simple installation.

The system incorporates SUPERflex™-12 pipe at 150mm pipe centres and with a coverboard of 6mm ply (for 400mm joist spacing) and 9mm ply (for 600mm joists), can be used with any floor covering.

## Key system characteristics:


- On-joist suspended structural floor solution
- · Low-profile high-efficiency system
- Suitable for all joist types and centres
- Suitable for all heat sources
- Suitable for all floor coverings
- Dry installation
- Tested to BS EN1195

#### For:

- · Low-profile 22mm structural solution
- · Renovation or new build
- Suitable for boilers and heat pumps

#### **Key components:**

- OneBoard® Plus
- SUPERflex™-12 pipe
- · Manifold and water controls
- · Thermostats and wiring centres

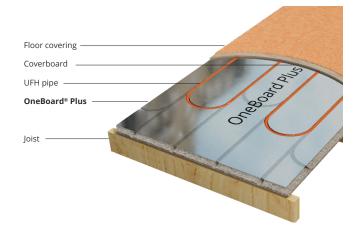

#### **Heat output**

150mm pipe centres

55W/m<sup>2</sup> to 65W/m<sup>2</sup>

\* Achieving a 20°C room temperature with an external temperature of -3°C, these heat outputs are approximate based on a flow temperature of  $40^{\circ}\text{C}$  -  $45^{\circ}\text{C}$  with a plywood coverboard and a 1 tog final floor covering. To be confirmed against heat loss calculations.

### About us

No ifs, no buts. The award-winning Continal® service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.