

# TileFix<sup>®</sup>-18 / TileFix<sup>®</sup>-25 system

TileFix<sup>®</sup> – The only system you can tile directly onto, with a lowprofile from just 18mm.

TileFix<sup>®</sup> fast-response, high compressive strength system, is ideal for renovation, new build, whole house and single room projects. Designed to accept direct tiling with a flexible tile adhesive and is typically installed over existing solid or timber deck floors.

The system is designed to accept ceramic, porcelain, marble and stone tiles, using a suitable tile adhesive. The universal TileFix® panels provide pipe routing for return loops and distribution, ensuring simple installation.

#### Key system characteristics:

- Overfloor system suitable for any floor construction
- Ultra-high compressive strength panel
- Tile directly onto panel
- Low-profile system
- Quick response
- High-performance system
- Universal panel for simple installation
- 18mm and 25mm variants

### System options:

The TileFix<sup>®</sup> system is available in 2 thicknesses

- TileFix®-18: For 12mm pipes at either 100mm or 150mm (Typically used in smaller areas or where minimal floor height build is required)
- TileFix<sup>®</sup>-25: For 16mm pipes at 150mm
  (Typically used for larger and whole-house areas)

#### Heat output TileFix<sup>®</sup>-18

100mm pipe centres	72W/m <sup>2</sup> to 80W/m <sup>2</sup>
150mm pipe centres	68W/m <sup>2</sup> to 75W/m <sup>2</sup>

## Heat output TileFix®-25

150mm pipe centres

72W/m<sup>2</sup> to 80W/m<sup>2</sup>

info@continal.nl

\* Achieving a 20°C room temperature with an external temperature of -3°C, these heat outputs are approximate based on a flow temperature of 40°C - 45°C with a plywood coverboard and a 1 tog final floor covering. To be confirmed against heat loss calculations.

#### For:

- Low profile build up
- · Tiling direct using suitable flexible adhesive
- Renovation or new build
- 100mm or 150mm pipe centres

## **Key components:**

- TileFix<sup>®</sup>-18 or TileFix<sup>®</sup>-25 composite panels
- TileFix<sup>®</sup> adhesive
- SUPERflex<sup>™</sup>-12 pipe (18mm panels)
- SUPERflex<sup>™</sup>-16 / AluPlas<sup>®</sup>-16 pipe (25mm panels)
- Manifold and water controls
- Thermostats and wiring centres

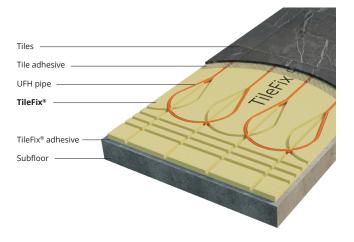


 Image: state state

## About us

No ifs, no buts. The award-winning Continal<sup>®</sup> service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.

ev:03/23 2023 Continal Group Ltd. All rights reserved. E & OE.

## 030 8903441

# www.continal.nl